

ALGE offers a wide range of electronic Lap Counters with a figure height of 15 or 25 cm and two or three figures. You may select between one-sided, two-sided or three-sided models. The unit is including integrated power pack (integrated battery and charger), tripod, external push button and, if required, a bell.

Model	Figure height	Reading distance	Number of digits	Number of faces	Bell
D-LC2-15-1	150 mm	70 m	2	1	no
D-LC2-15-2	150 mm	70 m	2	2	no
D-LC2-15-3	150 mm	70 m	2	3	no
D-LC2-25-1	250 mm	120 m	2	1	no
D-LC2-25-2	250 mm	120 m	2	2	no
D-LC2-25-3	250 mm	120 m	2	3	no
D-LC3-15-1	150 mm	70 m	3	1	no
D-LC3-15-2	150 mm	70 m	3	2	no
D-LC3-15-3	150 mm	70 m	3	3	no
D-LC3-25-1	250 mm	120 m	3	1	no
D-LC3-25-2	250 mm	120 m	3	2	no
D-LC3-25-3	250 mm	120 m	3	3	no
D-LCB2-15-1	150 mm	70 m	2	1	yes
D-LCB2-15-2	150 mm	70 m	2	2	yes
D-LCB2-15-3	150 mm	70 m	2	3	yes
D-LCB2-25-1	250 mm	120 m	2	1	yes
D-LCB2-25-2	250 mm	120 m	2	2	yes
D-LCB2-25-3	250 mm	120 m	2	3	yes
D-LCB3-15-1	150 mm	70 m	3	1	yes
D-LCB3-15-2	150 mm	70 m	3	2	yes
D-LCB3-15-3	150 mm	70 m	3	3	yes
D-LCB3-25-1	250 mm	120 m	3	1	yes
D-LCB3-25-2	250 mm	120 m	3	2	yes
D-LCB3-25-3	250 mm	120 m	3	3	yes

The lap counter is made for outdoor useage and has extra bright red LEDs, that you can see well even in direct sun light. It has a rugged aluminium case and is well-tested in all weather conditions.

The lap counter has two program modes:

Countdown Laps: From an preset value you count down until zero. After zero the lap counter returns to the preset value.

Countup Laps: For every lap you count one lap up.


The lap counter has an automatic powerdown (switches the LEDs off) to save batteries. After 10 minutes without changing the display, the energy saving mode activates itself. To re-activate the lap counter just press the push button.



Other configurations than stated above are available on request!

Example of the order code:

D-LCB2-25-2

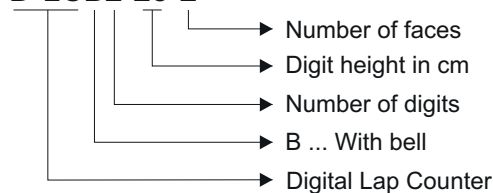

Digit with 150 mm figure height



Digit with 250 mm figure height



Technical Data:

- Red numeric 7-segment LED figures
- Two or three figures
- Connections:
 - Banana socket for external push button
 - Power Supply: internal battery or mains (100 - 240 VAC)
- Integrated power pack (battery with charger)
- On-Off Switch

- Automatic powerdown after 10 minutes
- Fastening: $\frac{3}{8}$ " thread for tripod
- Black aluminium case with red plexiglas front
- Operating temperature: -20°C to 60°C (-4°F to 140°F)
- Tripod to set up the lap counter
- External push button with 10 m cable
- Certain models: bell